

**4N25
4N37**

**4N26
H11A1**


**4N27
H11A2**

**4N28
H11A3**


**4N35
H11A4**

**4N36
H11A5**

WHITE PACKAGE (-M SUFFIX)

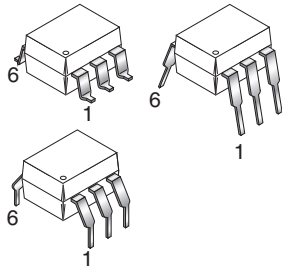


SCHEMATIC



PIN 1. ANODE
2. CATHODE
3. NO CONNECTION
4. EMITTER
5. COLLECTOR
6. BASE

BLACK PACKAGE (NO -M SUFFIX)



DESCRIPTION

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode driving a silicon phototransistor in a 6-pin dual in-line package.

FEATURES

- UL recognized (File # E90700)
- VDE recognized (File # 94766)
 - Add option V for white package (e.g., 4N25V-M)
 - Add option 300 for black package (e.g., 4N25.300)
- Also available in white package by specifying -M suffix, eg. 4N25-M

APPLICATIONS

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**

**4N28
H11A3**

**4N35
H11A4**

**4N36
H11A5**

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Units
TOTAL DEVICE			
Storage Temperature	T_{STG}	-55 to +150	$^\circ\text{C}$
Operating Temperature	T_{OPR}	-55 to +100	$^\circ\text{C}$
Lead Solder Temperature	T_{SOL}	260 for 10 sec	$^\circ\text{C}$
Total Device Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	250 3.3 (non-M), 2.94 (-M)	mW
EMITTER			
DC/Average Forward Input Current	I_F	100 (non-M), 60 (-M)	mA
Reverse Input Voltage	V_R	6	V
Forward Current - Peak (300 μs , 2% Duty Cycle)	$I_{F(pk)}$	3	A
LED Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	150 (non-M), 120 (-M) 2.0 (non-M), 1.41 (-M)	mW mW/ $^\circ\text{C}$
DETECTOR			
Collector-Emitter Voltage	V_{CEO}	30	V
Collector-Base Voltage	V_{CBO}	70	V
Emitter-Collector Voltage	V_{ECO}	7	V
Detector Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	150 2.0 (non-M), 1.76 (-M)	mW mW/ $^\circ\text{C}$

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**

**4N28
H11A3**

**4N35
H11A4**

**4N36
H11A5**

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

INDIVIDUAL COMPONENT CHARACTERISTICS

Parameter	Test Conditions	Symbol	Min	Typ**	Max	Unit
EMITTER						
Input Forward Voltage	($I_F = 10 \text{ mA}$)	V_F		1.18	1.50	V
Reverse Leakage Current	($V_R = 6.0 \text{ V}$)	I_R		0.001	10	μA
DETECTOR						
Collector-Emitter Breakdown Voltage	($I_C = 1.0 \text{ mA}, I_F = 0$)	BV_{CEO}	30	100		V
Collector-Base Breakdown Voltage	($I_C = 100 \mu\text{A}, I_F = 0$)	BV_{CBO}	70	120		V
Emitter-Collector Breakdown Voltage	($I_E = 100 \mu\text{A}, I_F = 0$)	BV_{ECO}	7	10		V
Collector-Emitter Dark Current	($V_{CE} = 10 \text{ V}, I_F = 0$)	I_{CEO}		1	50	nA
Collector-Base Dark Current	($V_{CB} = 10 \text{ V}$)	I_{CBO}			20	nA
Capacitance	($V_{CE} = 0 \text{ V}, f = 1 \text{ MHz}$)	C_{CE}		8		pF

ISOLATION CHARACTERISTICS

Characteristic	Test Conditions	Symbol	Min	Typ**	Max	Units
Input-Output Isolation Voltage	(Non-'M', Black Package) ($f = 60 \text{ Hz}, t = 1 \text{ min}$)	V_{ISO}	5300			Vac(rms)*
	('M', White Package) ($f = 60 \text{ Hz}, t = 1 \text{ sec}$)		7500			Vac(pk)
Isolation Resistance	($V_{I-O} = 500 \text{ VDC}$)	R_{ISO}	10^{11}			Ω
Isolation Capacitance	($V_{I-O} = \&, f = 1 \text{ MHz}$)	C_{ISO}		0.5		pF
	('M' White Package)			0.2	2	pF

Note

* 5300 Vac(rms) for 1 minute equates to approximately 9000 Vac (pk) for 1 second

** Typical values at $T_A = 25^\circ\text{C}$

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**

**4N28
H11A3**

**4N35
H11A4**

**4N36
H11A5**

TRANSFER CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified.)

DC Characteristic	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit
Current Transfer Ratio, Collector to Emitter	$(I_F = 10 \text{ mA}, V_{CE} = 10 \text{ V})$	CTR	4N35 4N36 4N37	100			%
			H11A1	50			
			H11A5	30			
	4N25 4N26 H11A2 H11A3		20				
	4N27 4N28 H11A4		10				
	4N35 4N36 4N37		40				
	$(I_F = 10 \text{ mA}, V_{CE} = 10 \text{ V}, T_A = -55^\circ\text{C})$		4N35 4N36 4N37	40			
	$(I_F = 10 \text{ mA}, V_{CE} = 10 \text{ V}, T_A = +100^\circ\text{C})$		4N35 4N36 4N37	40			
Collector-Emitter Saturation Voltage	$(I_C = 2 \text{ mA}, I_F = 50 \text{ mA})$	$V_{CE(SAT)}$	4N25 4N26 4N27 4N28			0.5	V
	$(I_C = 0.5 \text{ mA}, I_F = 10 \text{ mA})$		4N35 4N36 4N37			0.3	
			H11A1 H11A2 H11A3 H11A4 H11A5			0.4	
AC Characteristic							
Non-Saturated Turn-on Time	$(I_F = 10 \text{ mA}, V_{CC} = 10 \text{ V}, R_L = 100\Omega)$ (Fig.20)	T_{ON}	4N25 4N26 4N27 4N28 H11A1 H11A2 H11A3 H11A4 H11A5		2		μs
Non Saturated Turn-on Time	$(I_C = 2 \text{ mA}, V_{CC} = 10 \text{ V}, R_L = 100\Omega)$ (Fig.20)	T_{ON}	4N35 4N36 4N37		2	10	μs

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**

**4N28
H11A3**

**4N35
H11A4**

**4N36
H11A5**

TRANSFER CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified.) (Continued)

AC Characteristic	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit
Turn-off Time	($I_F = 10 \text{ mA}$, $V_{CC} = 10 \text{ V}$, $R_L = 100\Omega$) (Fig.20)	T_{OFF}	4N25 4N26 4N27 4N28 H11A1 H11A2 H11A3 H11A4 H11A5		2		μs
	($I_C = 2 \text{ mA}$, $V_{CC} = 10 \text{ V}$, $R_L = 100\Omega$) (Fig.20)		4N35 4N36 4N37		2	10	

** Typical values at $T_A = 25^\circ\text{C}$

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**


**4N28
H11A3**

**4N35
H11A4**


**4N36
H11A5**

TYPICAL PERFORMANCE CURVES


**Fig. 1 LED Forward Voltage vs. Forward Current
(Black Package)**

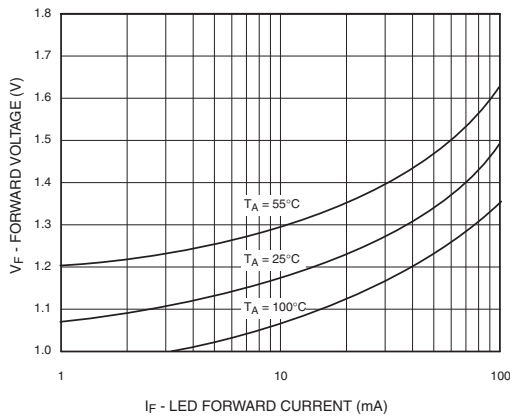


**Fig. 2 LED Forward Voltage vs. Forward Current
(White Package)**

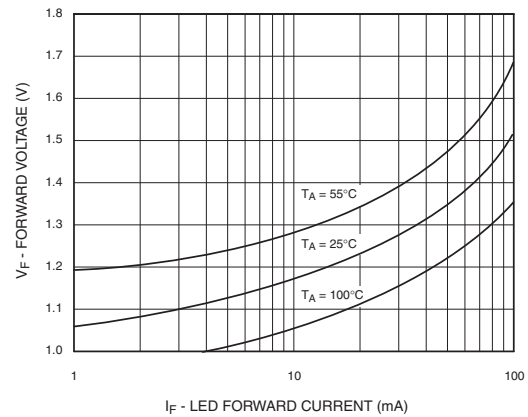


**Fig.3 Normalized CTR vs. Forward Current
(Black Package)**

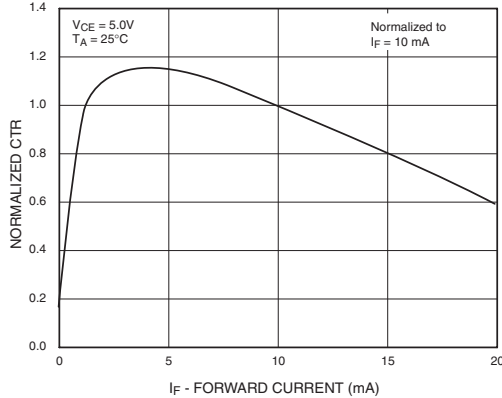


**Fig.4 Normalized CTR vs. Forward Current
(White Package)**

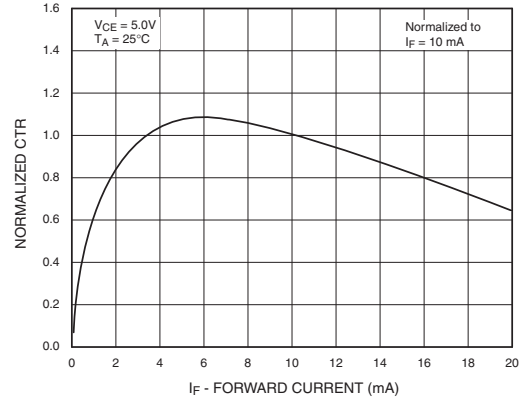

**Fig. 5 Normalized CTR vs. Ambient Temperature
(Black Package)**

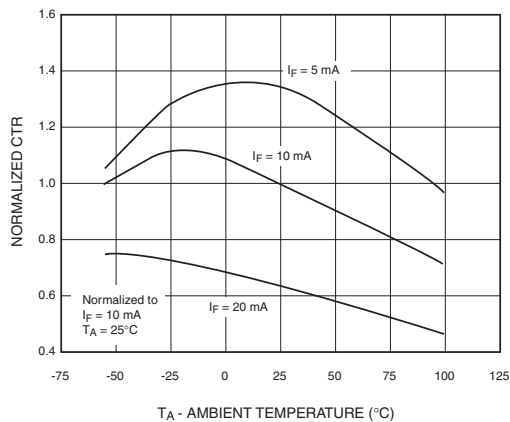

**Fig. 6 Normalized CTR vs. Ambient Temperature
(White Package)**

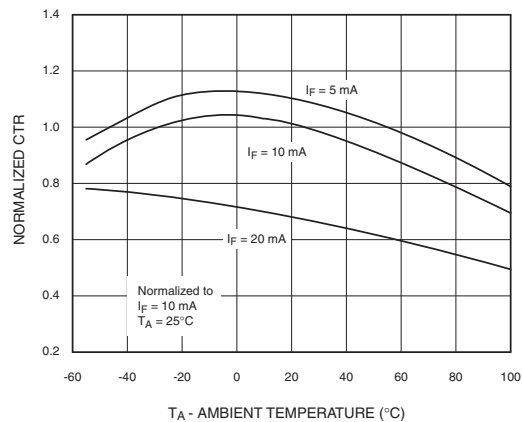

**4N25
4N37**

**4N26
H11A1**


**4N27
H11A2**

**4N28
H11A3**


**4N35
H11A4**

**4N36
H11A5**


**Fig. 7 CTR vs. RBE (Unsaturated)
(Black Package)**

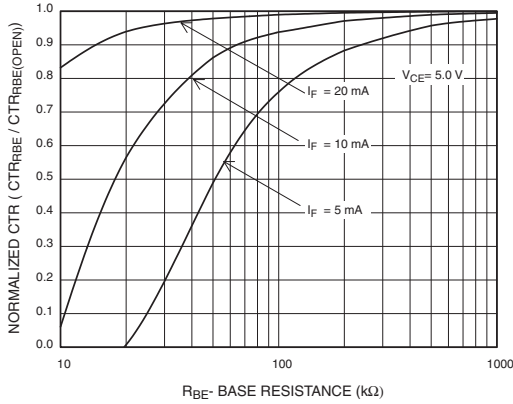


**Fig. 8 CTR vs. RBE (Unsaturated)
(White Package)**

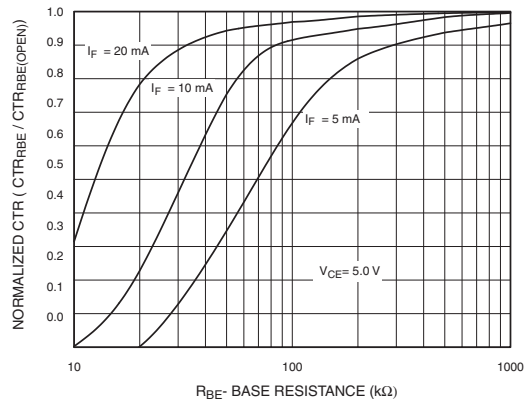


**Fig. 9 CTR vs. RBE (Saturated)
(Black Package)**

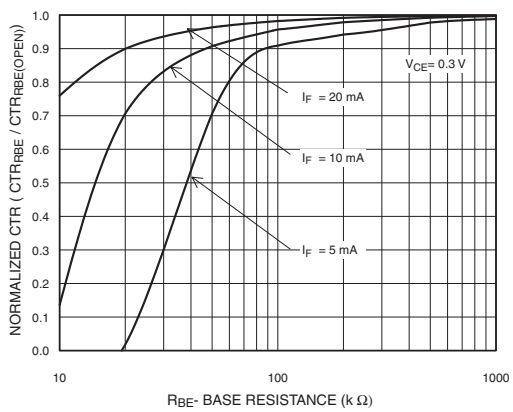


**Fig. 10 CTR vs. RBE (Saturated)
(White Package)**

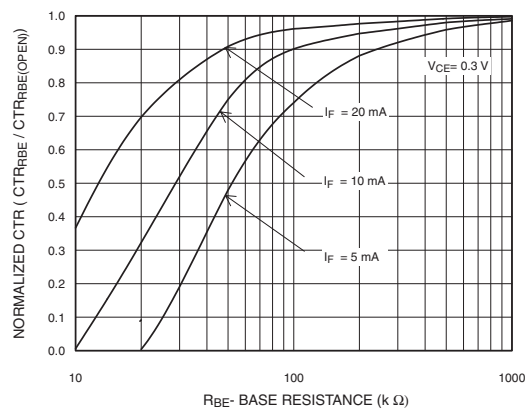

**Fig. 11 Collector-Emitter Saturation Voltage vs. Collector Current
(Black Package)**

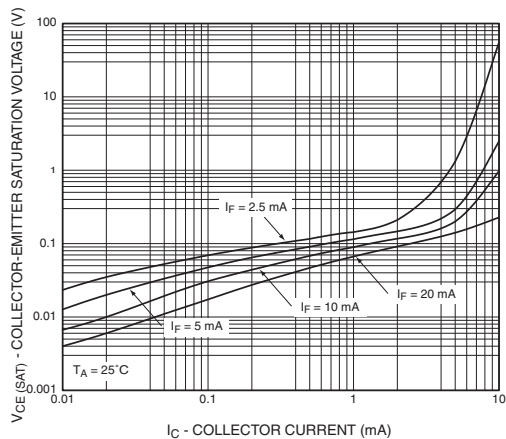

**Fig. 12 Collector-Emitter Saturation Voltage vs. Collector Current
(White Package)**

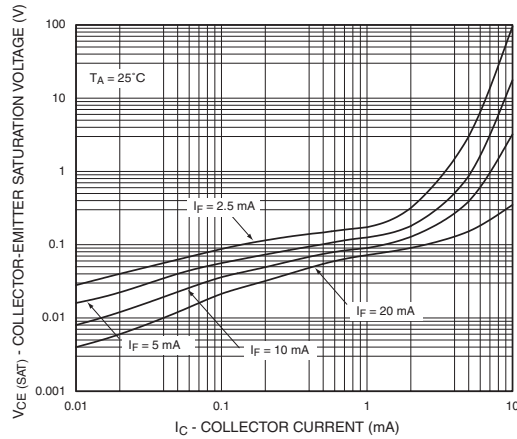

**4N25
4N37**

**4N26
H11A1**


**4N27
H11A2**

**4N28
H11A3**


**4N35
H11A4**

**4N36
H11A5**


**Fig. 13 Switching Speed vs. Load Resistor
(Black Package)**

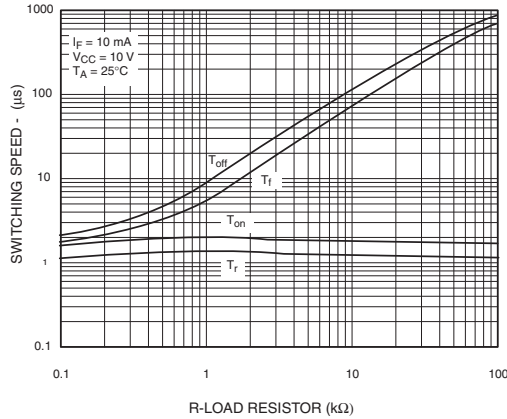


**Fig. 14 Switching Speed vs. Load Resistor
(White Package)**

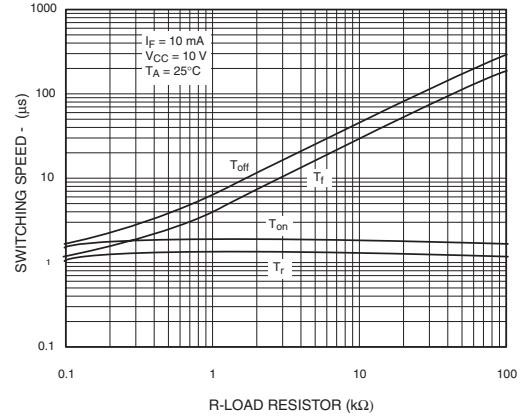


**Fig. 15 Normalized t_{on} vs. R_{BE}
(Black Package)**

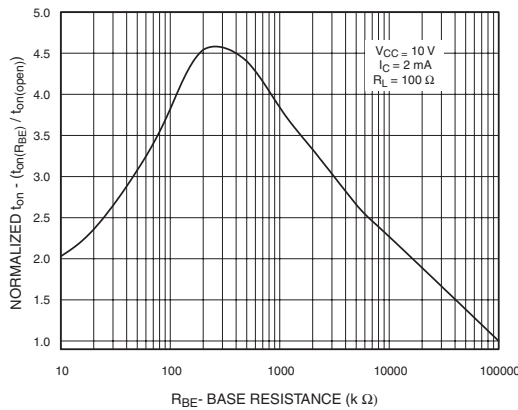


**Fig. 16 Normalized t_{on} vs. R_{BE}
(White Package)**

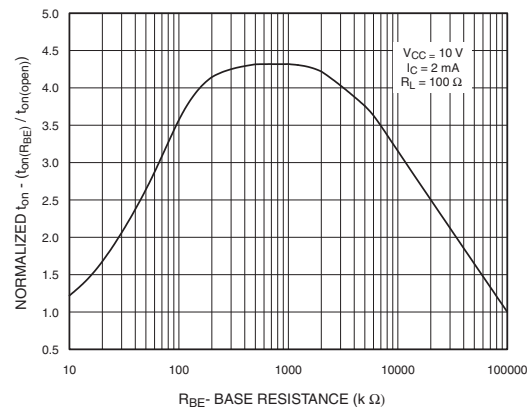

**Fig. 17 Normalized t_{off} vs. R_{BE}
(Black Package)**

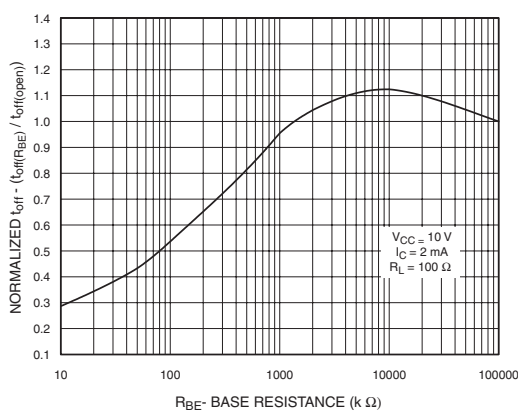

**Fig. 18 Normalized t_{off} vs. R_{BE}
(White Package)**

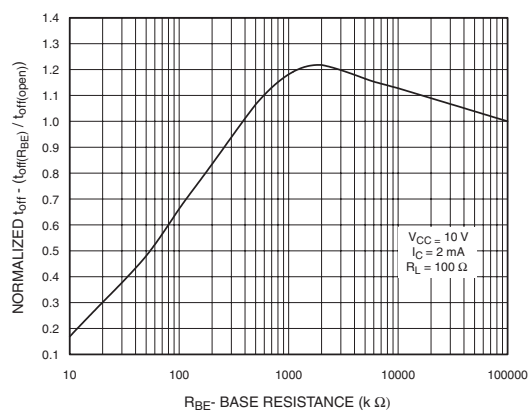

4N25
4N37

4N26
H11A1

4N27
H11A2

4N28
H11A3

4N35
H11A4

4N36
H11A5

Fig. 19 Dark Current vs. Ambient Temperature

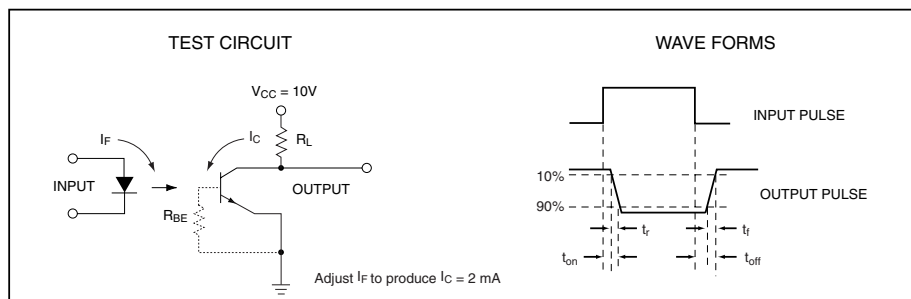
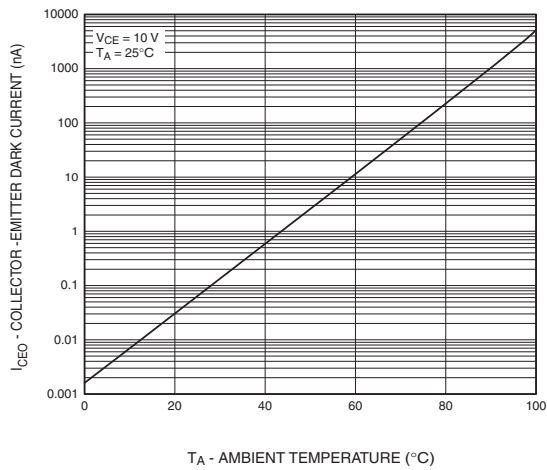


Figure 20. Switching Time Test Circuit and Waveforms

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**


**4N28
H11A3**

**4N35
H11A4**


**4N36
H11A5**

Black Package (No -M Suffix)


Package Dimensions (Through Hole)

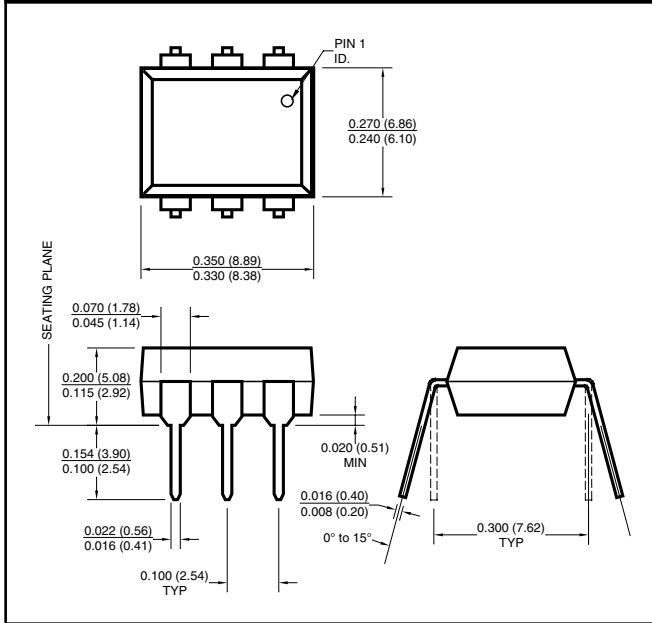


Package Dimensions (Surface Mount)

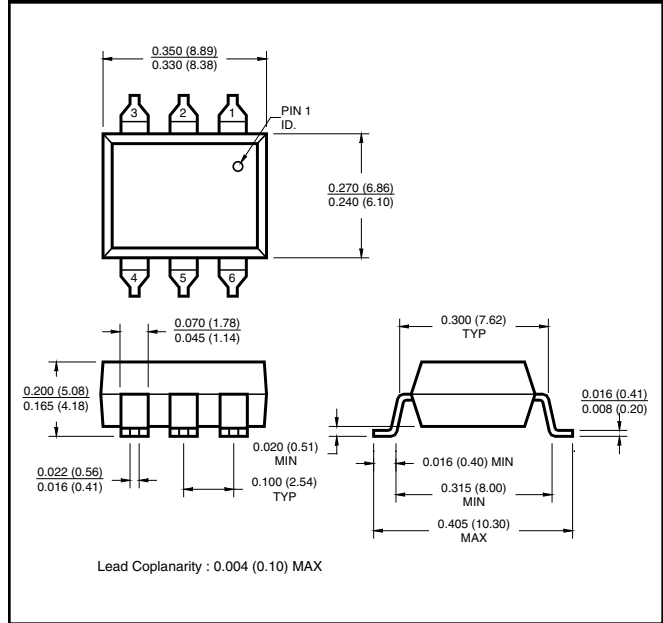

Package Dimensions (0.4" Lead Spacing)

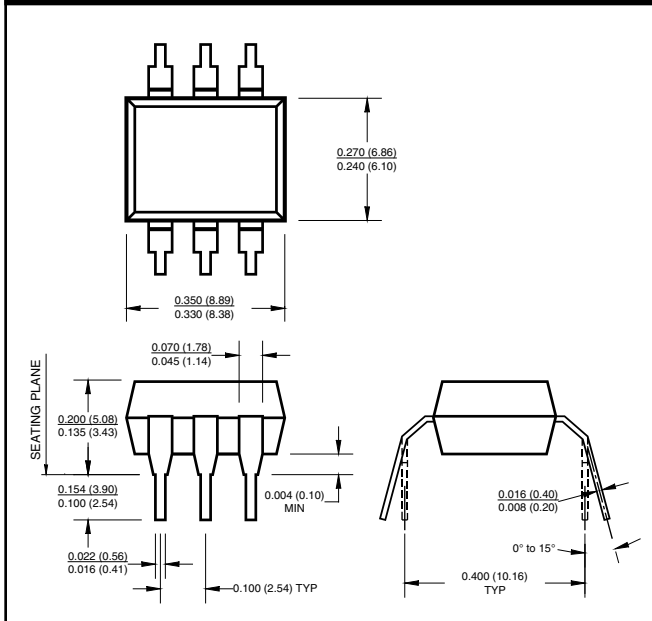

**Recommended Pad Layout for
Surface Mount Leadform**

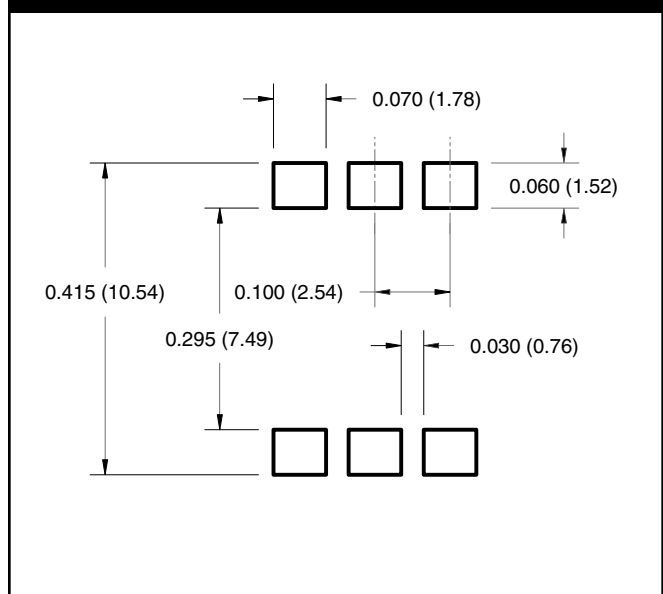

NOTE

All dimensions are in inches (millimeters)

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**


**4N28
H11A3**

**4N35
H11A4**


**4N36
H11A5**

White Package (-M Suffix)


Package Dimensions (Through Hole)

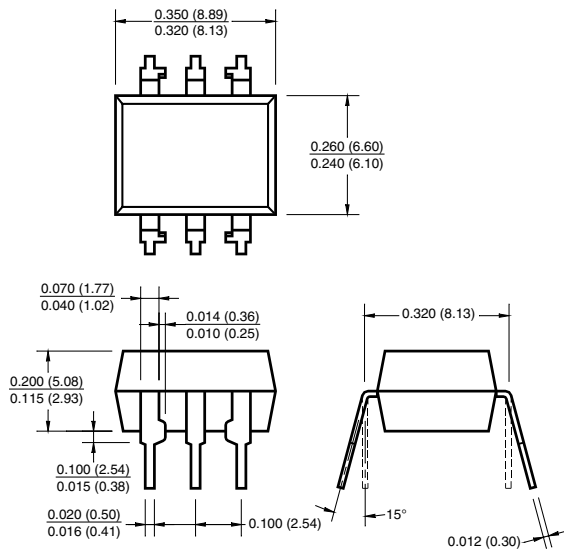


Package Dimensions (Surface Mount)

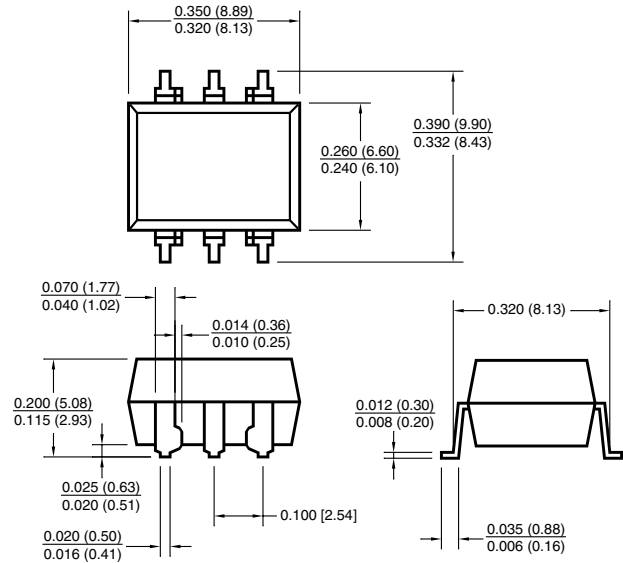

Package Dimensions (0.4" Lead Spacing)

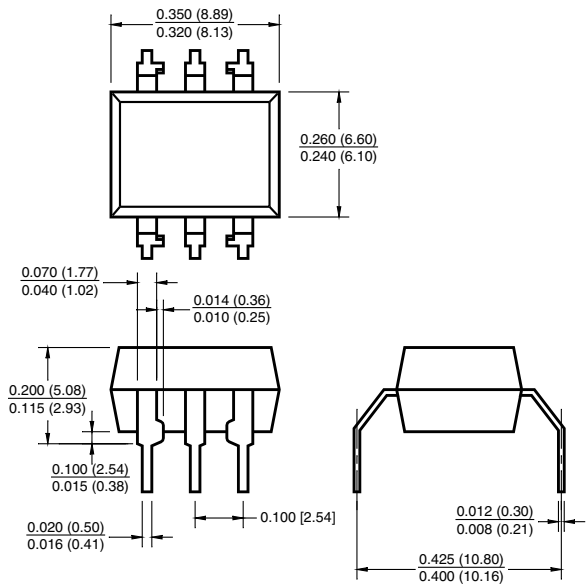

**Recommended Pad Layout for
Surface Mount Leadform**

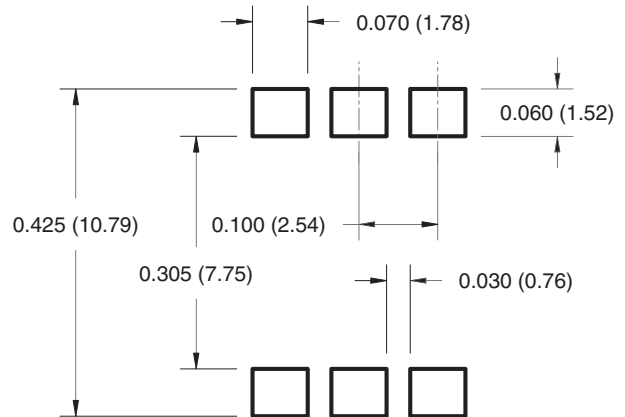

NOTE

All dimensions are in inches (millimeters)

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**

**4N28
H11A3**

**4N35
H11A4**


**4N36
H11A5**

ORDERING INFORMATION


Order Entry Identifier

Black Package (No Suffix)	White Package (-m Suffix)	Option
.S	S	Surface Mount Lead Bend
.SD	SR2	Surface Mount; Tape and reel
.W	T	0.4" Lead Spacing
.300	V	VDE 0884
.300W	TV	VDE 0884, 0.4" Lead Spacing
.3S	SV	VDE 0884, Surface Mount
.3SD	SR2V	VDE 0884, Surface Mount, Tape & Reel

QT Carrier Tape Specifications ("D" Taping Orientation) (Black Package, No Suffix)

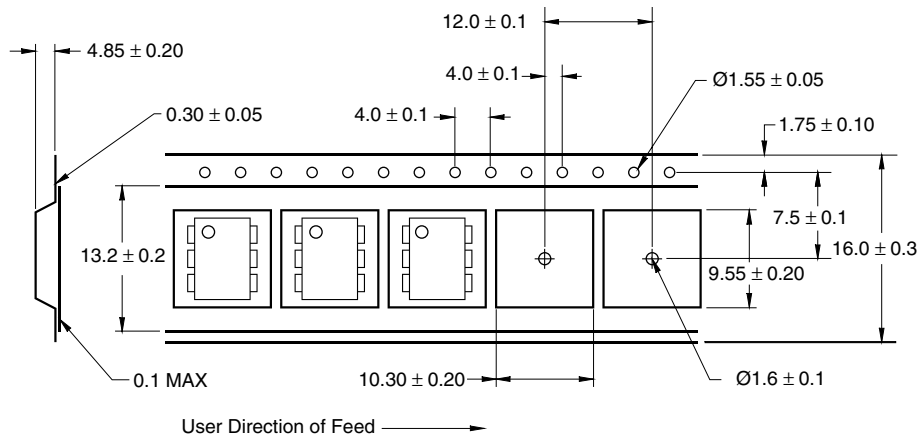

QT Carrier Tape Specifications ("D" Taping Orientation) (White Package, -M Suffix)

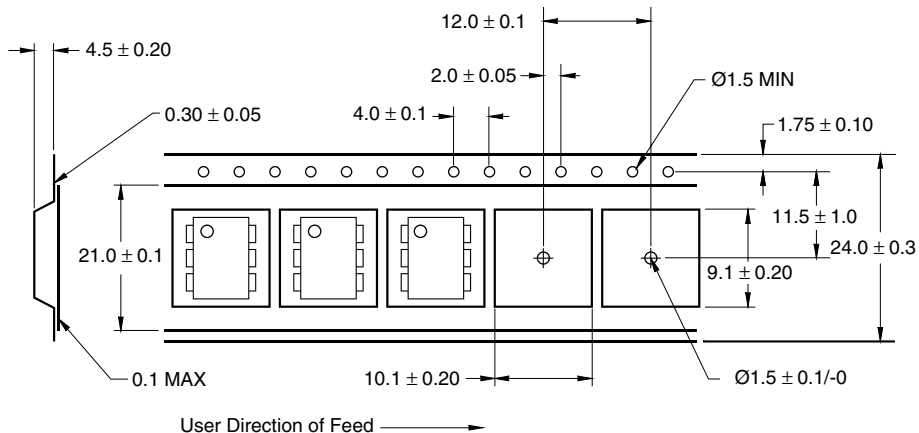

**4N25
4N37**

**4N26
H11A1**

**4N27
H11A2**

**4N28
H11A3**

**4N35
H11A4**

**4N36
H11A5**

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor

SEARCH | Parametric | Cross Reference

space

Product Folders and

Applies

find products

Home >> Find products >>

Products groups

Analog and Mixed

Signal

Discrete

Interface

Logic

Microcontrollers

Non-Volatile

Memory

Optoelectronics

Markets and

applications

New products

Product selection and

parametric search

Cross-reference

search

4N28-M

6-Pin White Package Phototransistor 6-PIN, DIP

Contents

[General description](#) | [Features](#) | [Applications](#) | [Ordering information](#) | [Product status/pricing/packaging](#) | [Safety agency certificates](#)

General description

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode a silicon phototransistor in a 6-Pin dual-in-line package.

[back to top](#)

Features

- Underwriters Laboratory (UL) recognized - File #E90700
- VDE recognized - File #94766

- Add option V for white package (e.g. 4N25V-M)

- Add option 300 for black package (e.g. 4N25.300)

- Also available in white package by specified - M suffix, e.g. 4N25-M except H11A2, H11A4 and H11A5

[back to top](#)

Applications

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)



[e-mail this datasheet](#)



This page

[Print version](#)

technical information

buy products

technical support

my Fairchild

company

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

[back to top](#)

Ordering information

The following options can be ordered with this part:

Option	Order Entry Identifier	Description
300	.300	VDE 0884
3S	.3S	Option S (see below); VDE 0884
3SD	.3SD	Option S (see below); VDE 0884; Tape and Reel
R2	.R2	Opto Plus 2 Reliability Conditioning
S	.S	Surface-Mount Lead Bend
SD	.SD	Option S; Tape and Reel
W	.W	10 mm Lead Bend

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
4N28FR2V-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N28TV-M	Full Production	\$0.132	N/A	N/A	RAIL
4N28FV-M	Full Production	\$0.149	N/A	N/A	RAIL
4N28SR2-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N28-M	Full Production	\$0.132	N/A	N/A	RAIL
4N28F-M	Full Production	\$0.149	N/A	N/A	RAIL
4N28V-M	Full Production	\$0.132	N/A	N/A	RAIL
4N28T-M	Full Production	\$0.132	DIP	6	RAIL
4N28FR2-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N28SR2V-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N28S-M	Full Production	\$0.132	DIP	6	RAIL
4N28SV-M	Full Production	\$0.132	DIP	6	RAIL

* 1,000 piece Budgetary Pricing

[back to top](#)

Safety agency certificates

Certificate	Agency	
310983-01 (95 K)	DEMKO	DEMKO Testing & Certification
P01101866 (383 K)	NEMKO	NEMKO
CR/0117 (424 K)	BABT	British Approvals Board of Telecommunications
102497 (1629 K)	VDE	VDE Pruf-und Zertifizierungsinstitut
1113639 (111 K)	CSA	Canadian Standards Association
0134082 (136 K)	SEMKO	SEMKO
FI 17434 (47 K)	FIMKO	FIMKO
E90700, Vol. 2 (254 K)	UL	Underwriters Laboratories Inc.

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

Fairchild Semiconductor

SEARCH | Parametric | Cross Reference

space

Product Folders and

Applies

find products

Home >> Find products >>

Products groups

Analog and Mixed

Signal

Discrete

Interface

Logic

Microcontrollers

Non-Volatile

Memory

Optoelectronics

Markets and

applications

New products

Product selection and

parametric search

Cross-reference

search

4N26-M

6-Pin White Package Phototransistor 6-PIN, DIP

Contents

[General description](#) | [Features](#) | [Applications](#) | [Ordering information](#) | [Product status/pricing/packaging](#) | [Safety agency certificates](#)

General description

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode a silicon phototransistor in a 6-Pin dual-in-line package.

[back to top](#)

Features

- Underwriters Laboratory (UL) recognized - File #E90700
- VDE recognized - File #94766

- Add option V for white package (e.g. 4N25V-M)

- Add option 300 for black package (e.g. 4N25.300)

- Also available in white package by specified - M suffix, e.g. 4N25-M except H11A2, H11A4 and H11A5

[back to top](#)

Applications

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)

PDF

[e-mail this datasheet](#)

[E-]

This page

[Print version](#)

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

[back to top](#)

Ordering information

The following options can be ordered with this part:

Option	Order Entry Identifier	Description
300	.300	VDE 0884
3S	.3S	Option S (see below); VDE 0884
3SD	.3SD	Option S (see below); VDE 0884; Tape and Reel
R2	.R2	Opto Plus 2 Reliability Conditioning
S	.S	Surface-Mount Lead Bend
SD	.SD	Option S; Tape and Reel
W	.W	10 mm Lead Bend

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
4N26FR2V-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N26-M	Full Production	\$0.132	N/A	N/A	RAIL
4N26FR2-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N26SR2-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N26V-M	Full Production	\$0.132	N/A	N/A	RAIL
4N26SV-M	Full Production	\$0.141	DIP	6	RAIL
4N26FV-M	Full Production	\$0.176	N/A	N/A	RAIL
4N26T-M	Full Production	\$0.132	DIP	6	RAIL
4N26TV-M	Full Production	\$0.141	N/A	N/A	RAIL
4N26S-M	Full Production	\$0.132	DIP	6	RAIL
4N26F-M	Full Production	\$0.149	N/A	N/A	RAIL
4N26SR2V-M	Full Production	\$0.141	DIP	6	TAPE REEL

* 1,000 piece Budgetary Pricing

[back to top](#)

Safety agency certificates

Certificate	Agency	
310983-01 (95 K)	DEMKO	DEMKO Testing & Certification
P01101866 (383 K)	NEMKO	NEMKO
CR/0117 (424 K)	BABT	British Approvals Board of Telecommunications
102497 (1629 K)	VDE	VDE Pruf-und Zertifizierungsinstitut
1113639 (111 K)	CSA	Canadian Standards Association
0134082 (136 K)	SEMKO	SEMKO
FI 17434 (47 K)	FIMKO	FIMKO
E90700, Vol. 2 (254 K)	UL	Underwriters Laboratories Inc.

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

Fairchild Semiconductor

SEARCH | Parametric | Cross Reference

space

Product Folders and

Applies

find products

Home >> Find products >>

Products groups

Analog and Mixed

Signal

Discrete

Interface

Logic

Microcontrollers

Non-Volatile

Memory

Optoelectronics

Markets and

applications

New products

Product selection and

parametric search

Cross-reference

search

4N27-M

6-Pin White Package Phototransistor 6-PIN, DIP

Contents

[General description](#) | [Features](#) | [Applications](#) | [Ordering information](#) | [Product status/pricing/packaging](#) | [Safety agency certificates](#)

General description

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode a silicon phototransistor in a 6-Pin dual-in-line package.

[back to top](#)

Features

- Underwriters Laboratory (UL) recognized - File #E90700
- VDE recognized - File #94766

- Add option V for white package (e.g. 4N25V-M)

- Add option 300 for black package (e.g. 4N25.300)

- Also available in white package by specified - M suffix, e.g. 4N25-M except H11A2, H11A4 and H11A5

[back to top](#)

Applications

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)

PDF

[e-mail this datasheet](#)

[E-]

This page

[Print version](#)

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

[back to top](#)

Ordering information

The following options can be ordered with this part:

Option	Order Entry Identifier	Description
300	.300	VDE 0884
3S	.3S	Option S (see below); VDE 0884
3SD	.3SD	Option S (see below); VDE 0884; Tape and Reel
R2	.R2	Opto Plus 2 Reliability Conditioning
S	.S	Surface-Mount Lead Bend
SD	.SD	Option S; Tape and Reel
W	.W	10 mm Lead Bend

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
4N27SV-M	Full Production	\$0.132	DIP	6	RAIL
4N27FV-M	Full Production	\$0.149	N/A	N/A	RAIL
4N27SR2V-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N27SR2-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N27S-M	Full Production	\$0.132	DIP	6	RAIL
4N27TV-M	Full Production	\$0.132	N/A	N/A	RAIL
4N27-M	Full Production	\$0.132	N/A	N/A	RAIL
4N27F-M	Full Production	\$0.149	N/A	N/A	RAIL
4N27T-M	Full Production	\$0.132	DIP	6	RAIL
4N27FR2V-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N27FR2-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N27V-M	Full Production	\$0.132	N/A	N/A	RAIL

* 1,000 piece Budgetary Pricing

[back to top](#)

Safety agency certificates

Certificate	Agency	
310983-01 (95 K)	DEMKO	DEMKO Testing & Certification
P01101866 (383 K)	NEMKO	NEMKO
CR/0117 (424 K)	BABT	British Approvals Board of Telecommunications
102497 (1629 K)	VDE	VDE Pruf-und Zertifizierungsinstitut
1113639 (111 K)	CSA	Canadian Standards Association
0134082 (136 K)	SEMKO	SEMKO
FI 17434 (47 K)	FIMKO	FIMKO
E90700, Vol. 2 (254 K)	UL	Underwriters Laboratories Inc.

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

Fairchild Semiconductor

SEARCH | Parametric | Cross Reference

space

Product Folders and

Applies

find products

Home >> Find products >>

Products groups

Analog and Mixed

Signal

Discrete

Interface

Logic

Microcontrollers

Non-Volatile

Memory

Optoelectronics

Markets and

applications

New products

Product selection and

parametric search

Cross-reference

search

4N25-M
6-Pin White Package Phototransistor 6-PIN,
DIP

Contents

[General description](#) | [Features](#) | [Applications](#) |
[Ordering information](#) | [Product](#)
[status/pricing/packaging](#) | [Safety agency](#)
[certificates](#)

General description

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode a silicon phototransistor in a 6-Pin dual-in-line package.

[back to top](#)

Features

- Underwriters Laboratory (UL) recognized - File #E90700
- VDE recognized - File #94766

- Add option V for white package (e.g. 4N25V-M)

- Add option 300 for black package (e.g. 4N25.300)

- Also available in white package by specified - M suffix, e.g. 4N25-M except H11A2, H11A4 and H11A5

[back to top](#)

Applications

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)

PDF

[e-mail this datasheet](#)

[E-

This page

[Print version](#)

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

[back to top](#)

Ordering information

The following options can be ordered with this part:

Option	Order Entry Identifier	Description
300	.300	VDE 0884
3S	.3S	Option S (see below); VDE 0884
3SD	.3SD	Option S (see below); VDE 0884; Tape and Reel
R2	.R2	Opto Plus 2 Reliability Conditioning
S	.S	Surface-Mount Lead Bend
SD	.SD	Option S; Tape and Reel
W	.W	10 mm Lead Bend

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
4N25FR2-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N25FV-M	Full Production	\$0.149	N/A	N/A	RAIL
4N25F-M	Full Production	\$0.149	N/A	N/A	RAIL
4N25TV-M	Full Production	\$0.132	N/A	N/A	RAIL
4N25SV-M	Full Production	\$0.132	DIP	6	RAIL
4N25T-M	Full Production	\$0.132	DIP	6	RAIL
4N25FR2V-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N25-M	Full Production	\$0.132	N/A	N/A	RAIL
4N25V-M	Full Production	\$0.132	N/A	N/A	RAIL
4N25SR2V-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N25S-M	Full Production	\$0.132	DIP	6	RAIL
4N25SR2-M	Full Production	\$0.141	DIP	6	TAPE REEL

* 1,000 piece Budgetary Pricing

[back to top](#)

Safety agency certificates

Certificate	Agency	
310983-01 (95 K)	DEMKO	DEMKO Testing & Certification
P01101866 (383 K)	NEMKO	NEMKO
CR/0117 (424 K)	BABT	British Approvals Board of Telecommunications
102497 (1629 K)	VDE	VDE Pruf-und Zertifizierungsinstitut
1113639 (111 K)	CSA	Canadian Standards Association
0134082 (136 K)	SEMKO	SEMKO
FI 17434 (47 K)	FIMKO	FIMKO
E90700, Vol. 2 (254 K)	UL	Underwriters Laboratories Inc.

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

Fairchild Semiconductor

SEARCH | Parametric | Cross Reference

space

Product Folders and

Applies

find products

Home >> Find products >>

Products groups

Analog and Mixed

Signal

Discrete

Interface

Logic

Microcontrollers

Non-Volatile

Memory

Optoelectronics

Markets and

applications

New products

Product selection and

parametric search

Cross-reference

search

4N35-M

6-Pin White Package Phototransistor 6-PIN, DIP

Contents

[General description](#) | [Features](#) | [Applications](#) | [Ordering information](#) | [Product status/pricing/packaging](#) | [Safety agency certificates](#)

General description

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode a silicon phototransistor in a 6-Pin dual-in-line package.

[back to top](#)

Features

- Underwriters Laboratory (UL) recognized - File #E90700
- VDE recognized - File #94766

- Add option V for white package (e.g. 4N25V-M)

- Add option 300 for black package (e.g. 4N25.300)

- Also available in white package by specified - M suffix, e.g. 4N25-M except H11A2, H11A4 and H11A5

[back to top](#)

Applications

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)

PDF

[e-mail this datasheet](#)

[E-

This page

[Print version](#)

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

[back to top](#)

Ordering information

The following options can be ordered with this part:

Option	Order Entry Identifier	Description
300	.300	VDE 0884
3S	.3S	Option S (see below); VDE 0884
3SD	.3SD	Option S (see below); VDE 0884; Tape and Reel
R2	.R2	Opto Plus 2 Reliability Conditioning
S	.S	Surface-Mount Lead Bend
SD	.SD	Option S; Tape and Reel
W	.W	10 mm Lead Bend

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
4N35FR2-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N35SR2V-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N35SR2-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N35T-M	Full Production	\$0.132	DIP	6	RAIL
4N35F-M	Full Production	\$0.149	N/A	N/A	RAIL
4N35SV-M	Full Production	\$0.132	DIP	6	RAIL
4N35FR2V-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N35V-M	Full Production	\$0.132	N/A	N/A	RAIL
4N35S-M	Full Production	\$0.132	DIP	6	RAIL
4N35FV-M	Full Production	\$0.149	N/A	N/A	RAIL
4N35TV-M	Full Production	\$0.132	DIP	6	RAIL
4N35-M	Full Production	\$0.132	N/A	N/A	RAIL

* 1,000 piece Budgetary Pricing

[back to top](#)

Safety agency certificates

Certificate	Agency	
310983-01 (95 K)	DEMKO	DEMKO Testing & Certification
P01101866 (383 K)	NEMKO	NEMKO
CR/0117 (424 K)	BABT	British Approvals Board of Telecommunications
102497 (1629 K)	VDE	VDE Pruf-und Zertifizierungsinstitut
1113639 (111 K)	CSA	Canadian Standards Association
0134082 (136 K)	SEMKO	SEMKO
FI 17434 (47 K)	FIMKO	FIMKO
E90700, Vol. 2 (254 K)	UL	Underwriters Laboratories Inc.

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

Fairchild Semiconductor

SEARCH | Parametric | Cross Reference

space

Product Folders and

Applies

find products

Home >> Find products >>

Products groups

Analog and Mixed

Signal

Discrete

Interface

Logic

Microcontrollers

Non-Volatile

Memory

Optoelectronics

Markets and

applications

New products

Product selection and

parametric search

Cross-reference

search

4N36-M

6-Pin White Package Phototransistor 6-PIN, DIP

Contents

[General description](#) | [Features](#) | [Applications](#) | [Ordering information](#) | [Product status/pricing/packaging](#) | [Safety agency certificates](#)

General description

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode a silicon phototransistor in a 6-Pin dual-in-line package.

[back to top](#)

Features

- Underwriters Laboratory (UL) recognized - File #E90700
- VDE recognized - File #94766

- Add option V for white package (e.g. 4N25V-M)

- Add option 300 for black package (e.g. 4N25.300)

- Also available in white package by specified - M suffix, e.g. 4N25-M except H11A2, H11A4 and H11A5

[back to top](#)

Applications

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)

PDF

[e-mail this datasheet](#)

[E-]

This page

[Print version](#)

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

[back to top](#)

Ordering information

The following options can be ordered with this part:

Option	Order Entry Identifier	Description
300	.300	VDE 0884
3S	.3S	Option S (see below); VDE 0884
3SD	.3SD	Option S (see below); VDE 0884; Tape and Reel
R2	.R2	Opto Plus 2 Reliability Conditioning
S	.S	Surface-Mount Lead Bend
SD	.SD	Option S; Tape and Reel
W	.W	10 mm Lead Bend

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
4N36SR2V-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N36V-M	Full Production	\$0.132	N/A	N/A	RAIL
4N36T-M	Full Production	\$0.132	DIP	6	RAIL
4N36TV-M	Full Production	\$0.132	N/A	N/A	RAIL
4N36FV-M	Full Production	\$0.149	N/A	N/A	RAIL
4N36FR2-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N36SV-M	Full Production	\$0.132	DIP	6	RAIL
4N36FR2V-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N36-M	Full Production	\$0.132	N/A	N/A	RAIL
4N36F-M	Full Production	\$0.149	N/A	N/A	RAIL
4N36SR2-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N36S-M	Full Production	\$0.132	DIP	6	RAIL

* 1,000 piece Budgetary Pricing

[back to top](#)

Safety agency certificates

Certificate	Agency	
310983-01 (95 K)	DEMKO	DEMKO Testing & Certification
P01101866 (383 K)	NEMKO	NEMKO
CR/0117 (424 K)	BABT	British Approvals Board of Telecommunications
102497 (1629 K)	VDE	VDE Pruf-und Zertifizierungsinstitut
1113639 (111 K)	CSA	Canadian Standards Association
0134082 (136 K)	SEMKO	SEMKO
FI 17434 (47 K)	FIMKO	FIMKO
E90700, Vol. 2 (254 K)	UL	Underwriters Laboratories Inc.

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

find products

Home >> Find products >>

Products groups

Analog and Mixed

Signal

Discrete

Interface

Logic

Microcontrollers

Non-Volatile

Memory

Optoelectronics

Markets and

applications

New products

Product selection and

parametric search

Cross-reference

search

4N37-M
6-Pin White Package Phototransistor 6-PIN,
DIP

Contents

[General description](#) | [Features](#) | [Applications](#) |
[Ordering information](#) | [Product](#)
[status/pricing/packaging](#) | [Safety agency](#)
[certificates](#)

General description

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode a silicon phototransistor in a 6-Pin dual-in-line package.

[back to top](#)

Features

- Underwriters Laboratory (UL) recognized - File #E90700
- VDE recognized - File #94766

- Add option V for white package (e.g. 4N25V-M)

- Add option 300 for black package (e.g. 4N25.300)

- Also available in white package by specified - M suffix, e.g. 4N25-M except H11A2, H11A4 and H11A5

[back to top](#)

Applications

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)



[e-mail this datasheet](#)



This page

[Print version](#)

technical information

buy products

technical support

my Fairchild

company

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

[back to top](#)

Ordering information

The following options can be ordered with this part:

Option	Order Entry Identifier	Description
300	.300	VDE 0884
3S	.3S	Option S (see below); VDE 0884
3SD	.3SD	Option S (see below); VDE 0884; Tape and Reel
R2	.R2	Opto Plus 2 Reliability Conditioning
S	.S	Surface-Mount Lead Bend
SD	.SD	Option S; Tape and Reel
W	.W	10 mm Lead Bend

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
4N37V-M	Full Production	\$0.132	N/A	N/A	RAIL
4N37S-M	Full Production	\$0.132	DIP	6	RAIL
4N37SR2V-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N37TV-M	Full Production	\$0.132	N/A	N/A	RAIL
4N37F-M	Full Production	\$0.149	N/A	N/A	RAIL
4N37SV-M	Full Production	\$0.132	DIP	6	RAIL
4N37FR2V-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N37FR2-M	Full Production	\$0.159	DIP	6	TAPE REEL
4N37SR2-M	Full Production	\$0.141	DIP	6	TAPE REEL
4N37T-M	Full Production	\$0.132	N/A	N/A	RAIL
4N37FV-M	Full Production	\$0.149	N/A	N/A	RAIL
4N37-M	Full Production	\$0.132	N/A	N/A	RAIL

* 1,000 piece Budgetary Pricing

[back to top](#)

Safety agency certificates

Certificate	Agency	
310983-01 (95 K)	DEMKO	DEMKO Testing & Certification
P01101866 (383 K)	NEMKO	NEMKO
CR/0117 (424 K)	BABT	British Approvals Board of Telecommunications
102497 (1629 K)	VDE	VDE Pruf-und Zertifizierungsinstitut
1113639 (111 K)	CSA	Canadian Standards Association
0134082 (136 K)	SEMKO	SEMKO
FI 17434 (47 K)	FIMKO	FIMKO
E90700, Vol. 2 (254 K)	UL	Underwriters Laboratories Inc.

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor