

# LM431A/LM431B/LM431C


## Programmable Shunt Regulator

### Features

- Programmable Output Voltage to 36 Volts
- Low Dynamic Output Impedance 0.20 Typical
- Sink Current Capability of 1.0 to 100mA
- Equivalent Full-Range Temperature Coefficient of 50ppm/ $^{\circ}$ C Typical
- Temperature Compensated for Operation Over Full Rated Operating Temperature Range
- Low Output Noise Voltage
- Fast Turn-on Response


### Description

The LM431A/LM431B/LM431C are three terminal output adjustable regulators with thermal stability over operating temperature range. The output voltage can be set any value between V<sub>REF</sub> (approximately 2.5 volts) and 36 volts with two external resistors. These devices have a typical dynamic output impedance of 0.2 $\Omega$ . Active output circuit provides a sharp turn-on characteristic, making these devices excellent replacement for Zener Diodes in many applications.

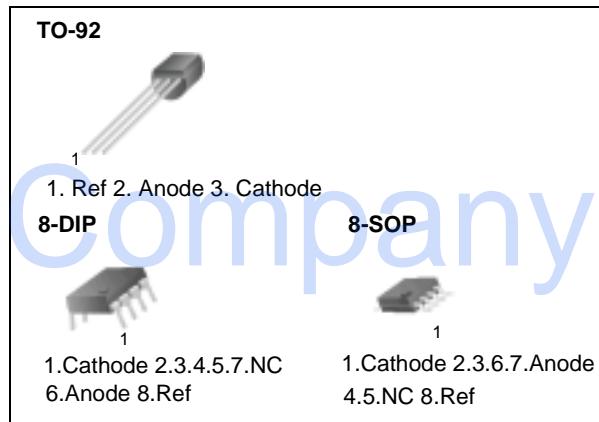

Datasheet.Company

### Internal Block Diagram

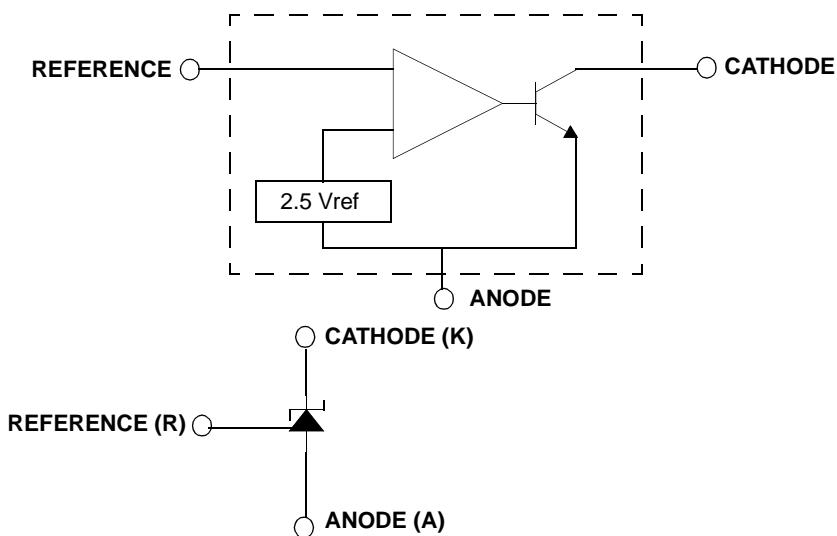

## Absolute Maximum Ratings

(Operating temperature range applies unless otherwise specified.)

| Parameter                                                    | Symbol           | Value       | Unit |
|--------------------------------------------------------------|------------------|-------------|------|
| Cathode Voltage                                              | V <sub>KA</sub>  | 37          | V    |
| Cathode Current Range (Continuous)                           | I <sub>KA</sub>  | -100 ~ +150 | mA   |
| Reference Input Current Range                                | I <sub>REF</sub> | 0.05 ~ +10  | mA   |
| Power Dissipation<br>M, Z Suffix Package<br>N Suffix Package | P <sub>D</sub>   | 770<br>1000 | mW   |
| <b>Operating Temperature Range</b>                           |                  |             |      |
| LM431xC                                                      | TOPR             | -25 ~ +85   | °C   |
| LM431xI                                                      |                  | -40 ~ +85   | °C   |
| Junction Temperature                                         | T <sub>J</sub>   | 150         | °C   |
| Storage Temperature Range                                    | T <sub>STG</sub> | -65 ~ +150  | °C   |

## Recommended Operating Conditions

| Parameter       | Symbol          | Min              | Typ | Max | Unit |
|-----------------|-----------------|------------------|-----|-----|------|
| Cathode Voltage | V <sub>KA</sub> | V <sub>REF</sub> | -   | 36  | V    |
| Cathode Current | I <sub>KA</sub> | 1.0              | -   | 100 | mA   |

## Electrical Characteristics

( $T_A = +25^\circ\text{C}$ , unless otherwise specified)

| Parameter                                                                   | Symbol                         | Conditions                                                                                | LM431A                                |       |       | LM431B |       |       | LM431C |       |       | Unit          |
|-----------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------|-------|-------|--------|-------|-------|--------|-------|-------|---------------|
|                                                                             |                                |                                                                                           | Min.                                  | Typ.  | Max.  | Min.   | Typ.  | Max.  | Min.   | Typ.  | Max.  |               |
| Reference Input Voltage                                                     | V <sub>REF</sub>               | $V_{KA} = V_{REF}$ , $I_{KA} = 10\text{mA}$                                               | 2.450                                 | 2.500 | 2.550 | 2.470  | 2.495 | 2.520 | 2.482  | 2.495 | 2.508 | V             |
| Deviation of Reference Input Voltage Over-Temperature                       | $\Delta V_{REF}/\Delta T$      | $V_{KA}=V_{REF}$ , $I_{KA}=10\text{mA}$<br>$T_{MIN} \leq T_A \leq T_{MAX}$                | -                                     | 4.5   | 17    | -      | 4.5   | 17    | -      | 4.5   | 17    | mV            |
| Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage | $\Delta V_{REF}/\Delta V_{KA}$ | $I_{KA} = 10\text{mA}$                                                                    | $\Delta V_{KA}=10\text{V}-V_{REF}$    | -     | -1.0  | -2.7   | -     | -1.0  | -2.7   | -     | -1.0  | -2.7          |
|                                                                             |                                |                                                                                           | $\Delta V_{KA}=36\text{V}-10\text{V}$ | -     | -0.5  | -2.0   | -     | -0.5  | -2.0   | -     | -0.5  | -2.0          |
| Reference Input Current                                                     | I <sub>REF</sub>               | $I_{KA}=10\text{mA}$ ,<br>$R_1=10\text{k}\Omega, R_2=\infty$                              | -                                     | 1.5   | 4     | -      | 1.5   | 4     | -      | 1.5   | 4     | $\mu\text{A}$ |
| Deviation of Reference Input Current Over Full Temperature Range            | $\Delta I_{REF}/\Delta T$      | $I_{KA}=10\text{mA}$ ,<br>$R_1=10\text{k}\Omega, R_2=\infty$<br>$T_A = \text{Full Range}$ | -                                     | 0.4   | 1.2   | -      | 0.4   | 1.2   | -      | 0.4   | 1.2   | $\mu\text{A}$ |
| Minimum Cathode Current for Regulation                                      | I <sub>KA(MIN)</sub>           | $V_{KA}=V_{REF}$                                                                          | -                                     | 0.45  | 1.0   | -      | 0.45  | 1.0   | -      | 0.45  | 1.0   | mA            |
| Off - Stage Cathode Current                                                 | I <sub>KA(OFF)</sub>           | $V_{KA}=36\text{V}$ ,<br>$V_{REF}=0$                                                      | -                                     | 0.05  | 1.0   | -      | 0.05  | 1.0   | -      | 0.05  | 1.0   | $\mu\text{A}$ |
| Dynamic Impedance                                                           | Z <sub>KA</sub>                | $V_{KA}=V_{REF}$ ,<br>$I_{KA}=1 \text{ to } 100\text{mA}$<br>$f \geq 1.0\text{kHz}$       | -                                     | 0.15  | 0.5   | -      | 0.15  | 0.5   | -      | 0.15  | 0.5   | $\Omega$      |

### Note1

- LM431xC :  $T_{MIN} = -25^\circ\text{C}$ ,  $T_{MAX} = +85^\circ\text{C}$
- LM431xI :  $T_{MIN} = -40^\circ\text{C}$ ,  $T_{MAX} = +85^\circ\text{C}$

## Test Circuits




Figure 1. Test Circuit for  $V_{KA}=V_{REF}$




Figure 2. Test Circuit for  $V_{KA} \geq V_{REF}$




Figure 3. Test Circuit for  $I_{KA(OFF)}$

## Typical Performance Characteristics

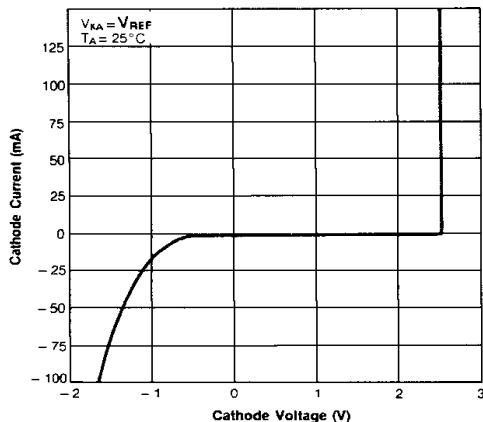


Figure 4. Cathode Current vs. Cathode Voltage

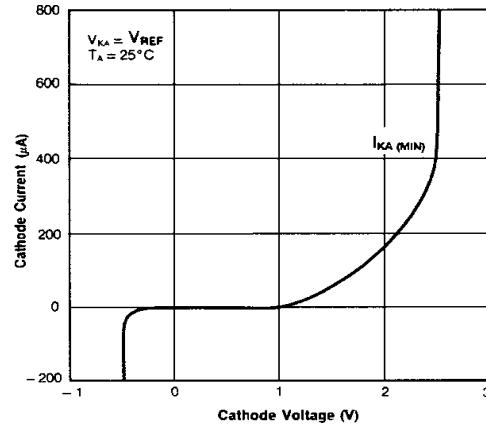


Figure 5. Cathode Current vs. Cathode Voltage

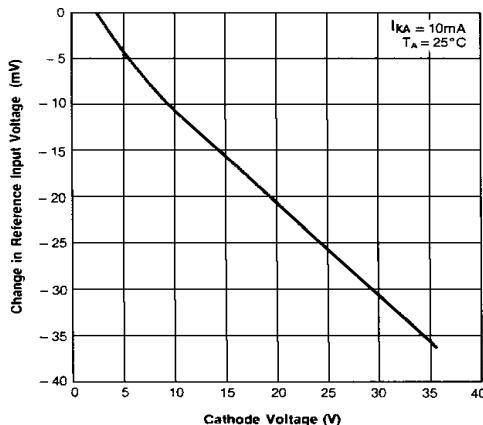


Figure 6. Change In Reference Input Voltage vs. Cathode Voltage

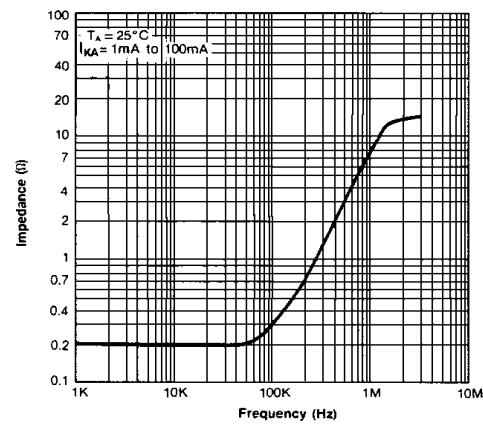


Figure 7. Dynamic Impedance Frequency

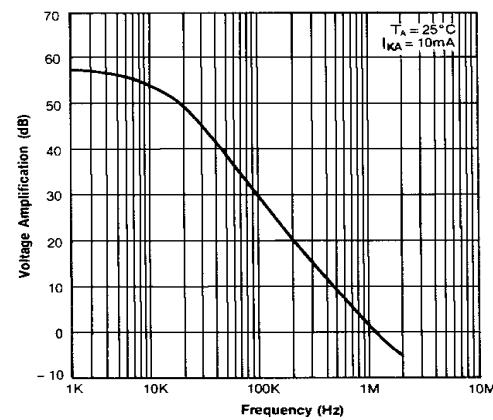


Figure 8. Small Signal Voltage Amplification vs. Frequency

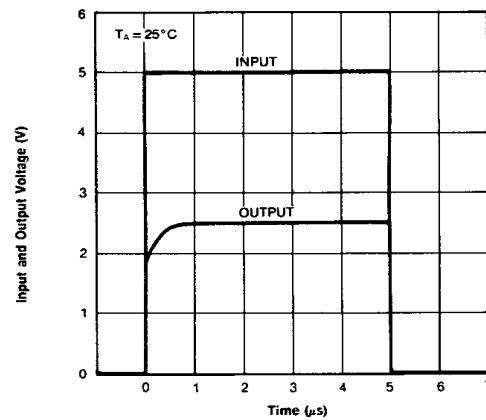
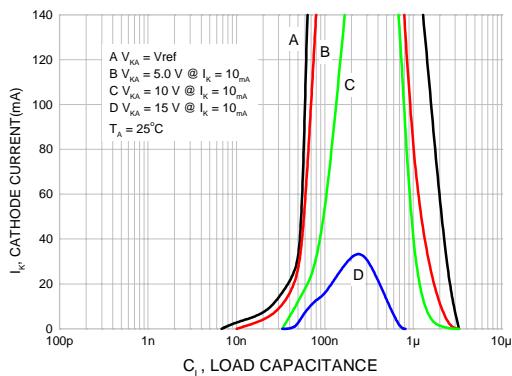


Figure 9. Pulse Response

## Typical Performance Characteristics (Continued)



**Figure 10. Stability Boundary Conditions**

## Typical Application

$$V_O = \left(1 + \frac{R_1}{R_2}\right)V_{ref}$$




Figure 11. Shunt Regulator

$$V_O = V_{ref} \left(1 + \frac{R_1}{R_2}\right)$$




Figure 12. Output Control for Three-Terminal Fixed Regulator

$$V_O = \left(1 + \frac{R_1}{R_2}\right)V_{ref}$$




Figure 13. High Current Shunt Regulator




Figure 14. Current Limit or Current Source





Figure 15. Constant-Current Sink


## Mechanical Dimensions


### Package

Dimensions in millimeters

## TO-92

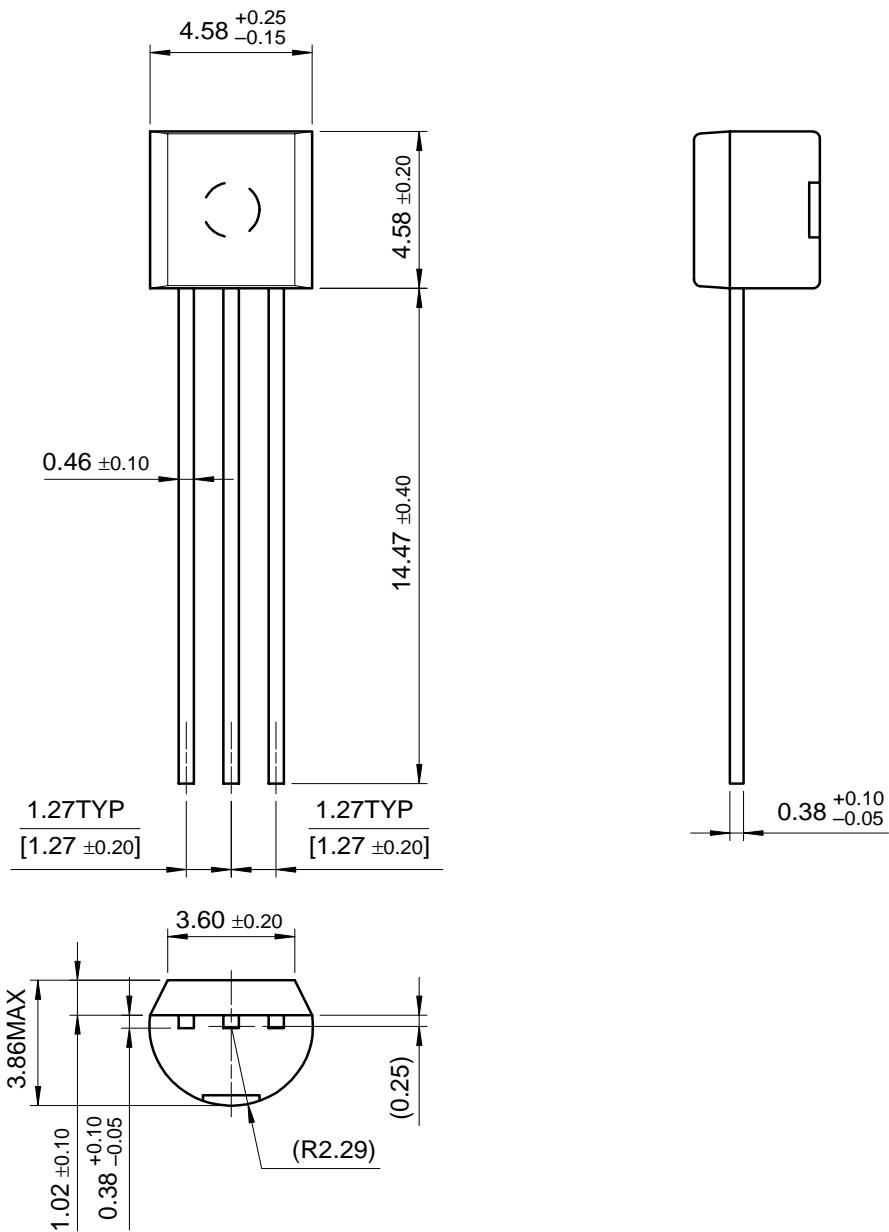

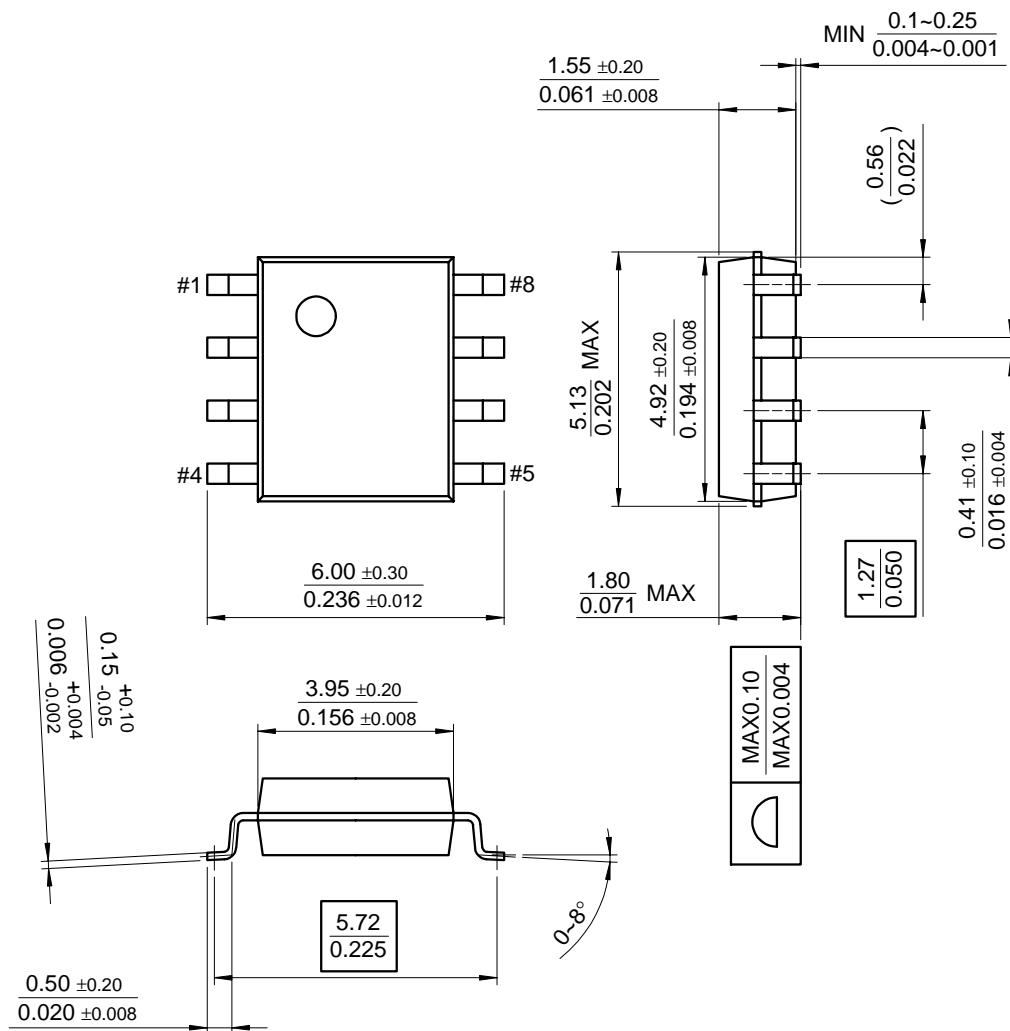**Mechanical Dimensions** (Continued)**Package****Dimensions in millimeters****8-SOP**

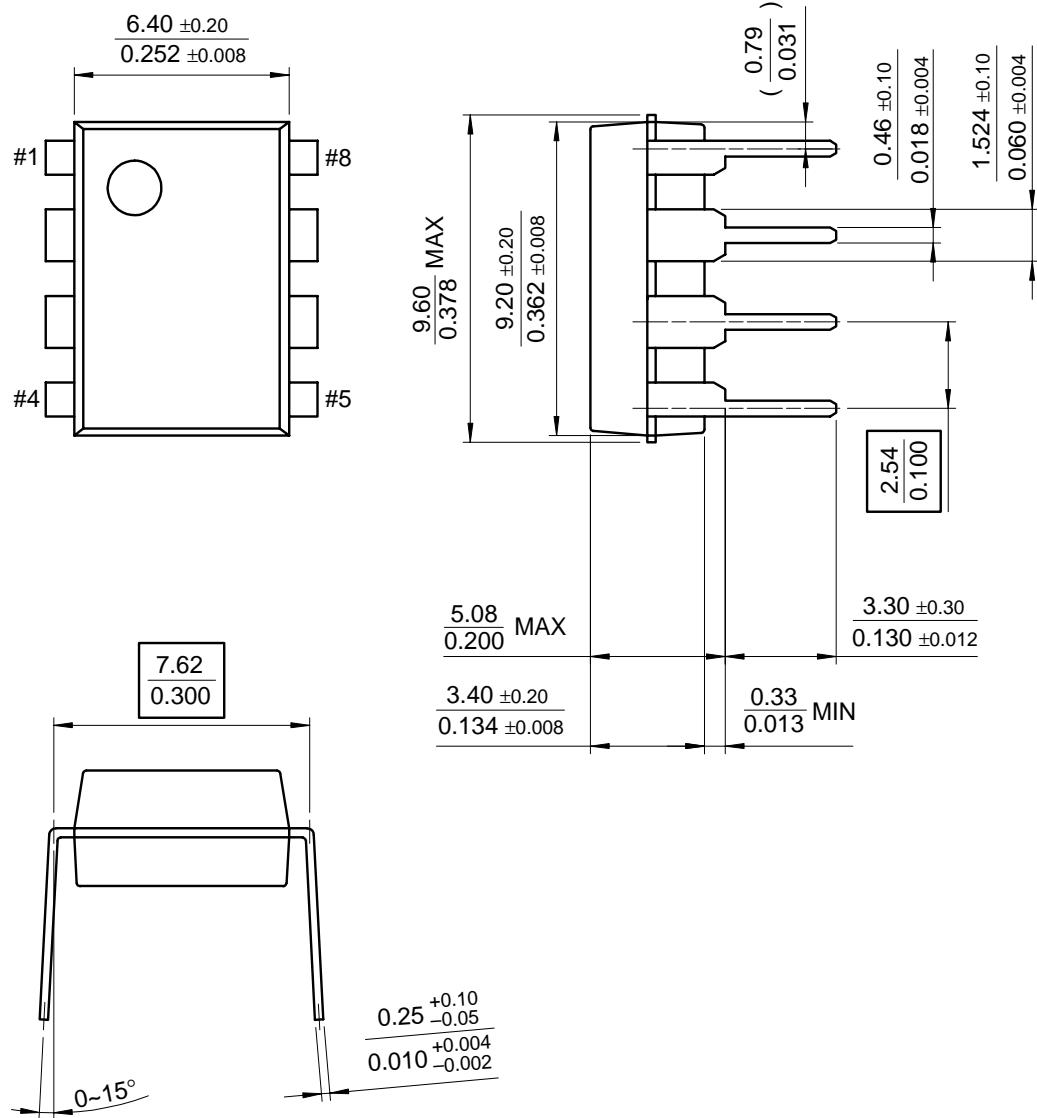**Mechanical Dimensions** (Continued)**Package****Dimensions in millimeters****8-DIP**

## Ordering Information

| Product Number | Output Voltage Tolerance | Package | Operating Temperature |
|----------------|--------------------------|---------|-----------------------|
| LM431CCZ       | 0.5%                     | TO-92   | -25 ~ +85 °C          |
| LM431CCM       |                          | 8-SOP   |                       |
| LM431BCZ       | 1%                       | TO-92   | -25 ~ +85 °C          |
| LM431BCM       |                          | 8-SOP   |                       |
| LM431ACN       | 2%                       | 8-DIP   | -40 ~ +85 °C          |
| LM431ACZ       |                          | TO-92   |                       |
| LM431ACM       |                          | 8-SOP   |                       |
| LM431CIZ       | 0.5%                     | TO-92   | -40 ~ +85 °C          |
| LM431CIM       |                          | 8-SOP   |                       |
| LM431BIZ       | 1%                       | TO-92   | -40 ~ +85 °C          |
| LM431BIM       |                          | 8-SOP   |                       |
| LM431AIZ       | 2%                       | TO-92   | -40 ~ +85 °C          |
| LM431AIM       |                          | 8-SOP   |                       |

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor

[SEARCH](#) | [Parametric](#) | [Cross Reference](#)[Inventory](#)[Space](#)[Product Folders and](#)[Announcements](#)

find products

[Home](#) >> [Find products](#) >>[Products groups](#)[Analog and Mixed](#)[Signal](#)[Discrete](#)[Interface](#)[Logic](#)[Microcontrollers](#)[Non-Volatile](#)[Memory](#)[Optoelectronics](#)[Markets and](#)[applications](#)[New products](#)[Product selection and](#)  
[parametric search](#)[Cross-reference](#)[search](#)[technical information](#)[buy products](#)[technical support](#)[my Fairchild](#)[company](#)

## LM431A

Adjustable/2.5V, 2% Tolerance Shunt  
Regulator

### Contents

[General description](#) | [Features](#) | [Product status/pricing/packaging](#) | [Application notes](#)

### General description

The LM431A/LM431B/LM431C are three-terminal output adjustable regulators with thermal stability over operating temperature range. The output voltage can be set any value between V<sub>REF</sub> (approximately 2.5 volts) and 36 volts with two external resistors. These devices have a typical dynamic output impedance of 0.2Ω. Active output circuit provides a sharp turn-on characteristic, making these devices excellent replacement for Zener Diodes in many applications.

[back to top](#)

### Features

- Programmable output voltage to 36 volts
- Low dynamic output impedance 0.20 typical
- Sink current capability of 1.0 to 100mA
- Equivalent full-range temperature coefficient of 50ppm/°C typical
- Temperature compensated for operation over full rated operating temperature range
- Low output noise voltage
- Fast turn-on response

[back to top](#)

### Related Links

[Request samples](#)[Dotted line](#)[How to order products](#)[Dotted line](#)[Product Change Notices \(PCNs\)](#)[Dotted line](#)[Support](#)[Dotted line](#)[Distributor and field sales representatives](#)[Dotted line](#)[Quality and reliability](#)[Dotted line](#)[Design tools](#)

## Product status/pricing/packaging

| Product    | Product status  | Inventory check & ordering | Package type          | Leads | Package marking         | Packing method |
|------------|-----------------|----------------------------|-----------------------|-------|-------------------------|----------------|
| LM431ACM   | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | RAIL           |
| LM431ACZ   | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | \$N&2&T<br>LM431<br>ACZ | BULK           |
| LM431ACMX  | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | TAPE REEL      |
| LM431AIMX  | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | TAPE REEL      |
| LM431ACZX  | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431ACZXA | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431AIZ   | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | BULK           |
| LM431AIZXA | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431AIM   | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | RAIL           |
| LM431AIZX  | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |

[back to top](#)

## Application notes

[AN-42043: AN-42043 ML4803 240W Off-Line Power Supply with PFC](#)  
 (296 K) Sep 27, 2002

[back to top](#)


---

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |  
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

---



---

© Copyright 2002 Fairchild Semiconductor

---

Fairchild Semiconductor

[SEARCH](#) | [Parametric](#) | [Cross Reference](#)[Inventory](#)[Space](#)[Product Folders and](#)[Announcements](#)

find products

[Home](#) >> [Find products](#) >>[Products groups](#)[Analog and Mixed](#)[Signal](#)[Discrete](#)[Interface](#)[Logic](#)[Microcontrollers](#)[Non-Volatile](#)[Memory](#)[Optoelectronics](#)[Markets and](#)[applications](#)[New products](#)[Product selection and](#)  
[parametric search](#)[Cross-reference](#)[search](#)[technical information](#)[buy products](#)[technical support](#)[my Fairchild](#)[company](#)

LM431B

Adjustable/2.5V, 1% Tolerance Shunt  
Regulator

Contents

[General description](#) | [Features](#) | [Product status/pricing/packaging](#)

## General description

The LM431A/LM431B/LM431C are three-terminal output adjustable regulators with thermal stability over operating temperature range. The output voltage can be set any value between  $V_{REF}$  (approximately 2.5 volts) and 36 volts with two external resistors. These devices have a typical dynamic output impedance of  $0.2\Omega$ . Active output circuit provides a sharp turn-on characteristic, making these devices excellent replacement for Zener Diodes in many applications.

[back to top](#)

## Features

- Programmable output voltage to 36 volts
- Low dynamic output impedance 0.20 typical
- Sink current capability of 1.0 to 100mA
- Equivalent full-range temperature coefficient of 50ppm/ $^{\circ}\text{C}$  typical
- Temperature compensated for operation over full rated operating temperature range
- Low output noise voltage
- Fast turn-on response

[back to top](#)

## Related Links

[Request samples](#)[Dotted line](#)[How to order products](#)[Dotted line](#)[Product Change Notices \(PCNs\)](#)[Dotted line](#)[Support](#)[Dotted line](#)[Distributor and field sales representatives](#)[Dotted line](#)[Quality and reliability](#)[Dotted line](#)[Design tools](#)

Datasheet

[Download this datasheet](#)[e-mail this datasheet](#)This page [Print version](#)

## Product status/pricing/packaging

| Product    | Product status  | Inventory check & ordering | Package type          | Leads | Package marking         | Packing method |
|------------|-----------------|----------------------------|-----------------------|-------|-------------------------|----------------|
| LM431BCMX  | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | TAPE REEL      |
| LM431BCZ   | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | \$N&2&T<br>LM431<br>BCZ | BULK           |
| LM431BIZXA | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431BCZX  | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431BIZ   | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | BULK           |
| LM431BCZXA | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431BIZX  | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431BIMX  | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | TAPE REEL      |
| LM431BIM   | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | RAIL           |
| LM431BCM   | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | RAIL           |

[back to top](#)


---

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |  
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

---



---

© Copyright 2002 Fairchild Semiconductor

---


[SEARCH](#) | [Parametric](#) | [Cross Reference](#) |

[Inventory](#)
[Space](#)
[Product Folders and](#)
[Announcements](#)
[find products](#)
[Home](#) >> [Find products](#) >>

[Products groups](#)
[Analog and Mixed](#)
[Signal](#)
[Discrete](#)
[Interface](#)
[Logic](#)
[Microcontrollers](#)
[Non-Volatile](#)
[Memory](#)
[Optoelectronics](#)
[Markets and](#)
[applications](#)
[New products](#)
[Product selection and](#)  
[parametric search](#)
[Cross-reference](#)
[search](#)
[technical information](#)
[buy products](#)
[technical support](#)
[my Fairchild](#)
[company](#)
**LM431C**

 Adjustable/2.5V, 0.5% Tolerance Shunt  
 Regulator

[Contents](#)
[General description](#) | [Features](#) | [Product status/pricing/packaging](#)

## General description

The LM431A/LM431B/LM431C are three-terminal output adjustable regulators with thermal stability over operating temperature range. The output voltage can be set any value between V<sub>REF</sub> (approximately 2.5 volts) and 36 volts with two external resistors. These devices have a typical dynamic output impedance of 0.2Ω. Active output circuit provides a sharp turn-on characteristic, making these devices excellent replacement for Zener Diodes in many applications.

[back to top](#)

## Features

- Programmable output voltage to 36 volts
- Low dynamic output impedance 0.20 typical
- Sink current capability of 1.0 to 100mA
- Equivalent full-range temperature coefficient of 50ppm/°C typical
- Temperature compensated for operation over full rated operating temperature range
- Low output noise voltage
- Fast turn-on response

[back to top](#)

## Related Links

[Request samples](#)
[Dotted line](#)
[How to order products](#)
[Dotted line](#)
[Product Change Notices \(PCNs\)](#)
[Dotted line](#)
[Support](#)
[Dotted line](#)
[Distributor and field sales representatives](#)
[Dotted line](#)
[Quality and reliability](#)
[Dotted line](#)
[Design tools](#)
[Datasheet](#)
[Download this datasheet](#)

[e-mail this datasheet](#)

[This page](#)
[Print version](#)

## Product status/pricing/packaging

| Product    | Product status  | Inventory check & ordering | Package type          | Leads | Package marking         | Packing method |
|------------|-----------------|----------------------------|-----------------------|-------|-------------------------|----------------|
| LM431CCZX  | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431CIZX  | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431CCZ   | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | \$N&2&T<br>LM431<br>CCZ | BULK           |
| LM431CIZXA | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431CCMX  | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | TAPE REEL      |
| LM431CCZXA | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | TAPE REEL      |
| LM431CIMX  | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | TAPE REEL      |
| LM431CCM   | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | RAIL           |
| LM431CIM   | Full Production | <a href="#">Purchase</a>   | <a href="#">SOIC</a>  | 8     | N/A                     | RAIL           |
| LM431CIZ   | Full Production | <a href="#">Purchase</a>   | <a href="#">TO-92</a> | 3     | N/A                     | BULK           |

[back to top](#)


---

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) |  
[Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

---



---

© Copyright 2002 Fairchild Semiconductor

---